



Water Connects Us®

Model  
**ST-2459-A Universal Closet**  
 Top Spud Vitreous China Elongated Water Closet

**DESCRIPTION**

Complete vitreous china water closet.

**Flush Cycle**

Model ST-2459-A Universal Closet  
 (1.1 to 1.6 gpf/4.2 to 6.0 Lpf)  
 Code: 2102459

Flush volume is determined by the flushometer used with closet.



**SPECIFICATIONS**

**Water Closet**



- Wall hung vitreous china elongated bowl
- Siphon jet flushing action
- 1-1/2" I.P.S. top spud inlet
- 2-1/8" fully glazed trapway diameter
- Mounting hardware, carrier and toilet seat not included
- Integral flushing rim
- Water spot area 11-1/4" x 8-1/2"
- ASME A112.19.2/CSA B45.1

**Colors/Finishes**

- White

**Recommended Accessories**

- Bemis:  
1955CT/1955SST  
2155CT/2155SST
- Church:  
295CT/295SST  
2155CT/2155SST

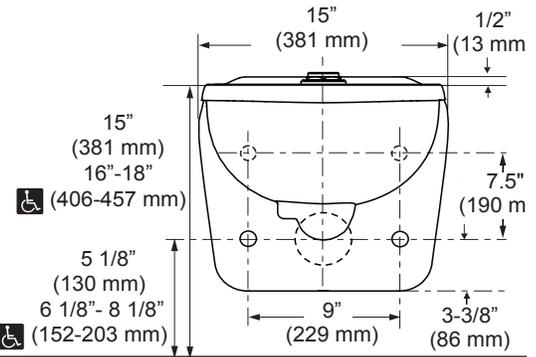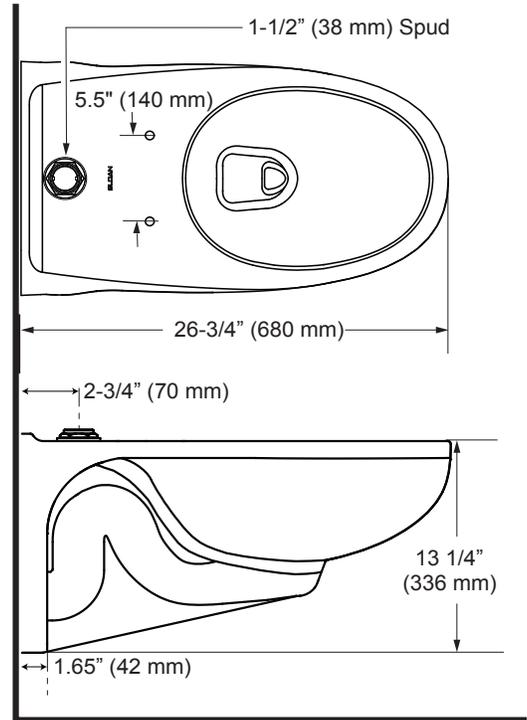

\*\* This model meets the requirements for a High Efficiency Toilet when used with a high efficiency flushometer (1.28 gpf/4.8 Lpf or 1.1/1.6 gpf-4.2/6.0 Lpf dual-flush).



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

**NOTE:**

Plumbing System Requirements

- ✓ Minimum **Flowing** Pressure: 25 PSI
- ✓ Maximum Static Pressure: 80 PSI
- ✓ Minimum Flow Rate: 18 gpm



**Product Specification**

Elongated water closet shall be made of vitreous china with a 1-1/2" top spud inlet. Bowl shall be ADA compliant when installed at required height of 17"-19" from floor to top of fixture (including seat). Water Closet shall be Sloan Model ST-2459-A.

This space for Architect/Engineer approval	
Job Name	Date
Model Specified	Quantity
Variations Specified	
Customer/Wholesaler	
Contractor	
Architect	



10500 Seymour Avenue  
 Franklin Park, IL 60131  
 Phone: 1-800-982-5839  
 Fax: 1-800-447-8329  
 www.sloanvalve.com

© 2015 Sloan Valve Company  
 ST-2459-A 09-15